


ACB SERIES



MAIN CHARACTERISTICS OF THE STERILIZER :


- > COST SAVER (LOW ENERGY AND LOW LABOUR)
- > FULLY AUTOMATED
- > HIGH QUALITY FINAL PRODUCTS
- > FLEXIBLE AND VERSATILE (FROM 100 ML TO 1000 ML BOTTLES)
- > RELIABLE AND EFFICIENT

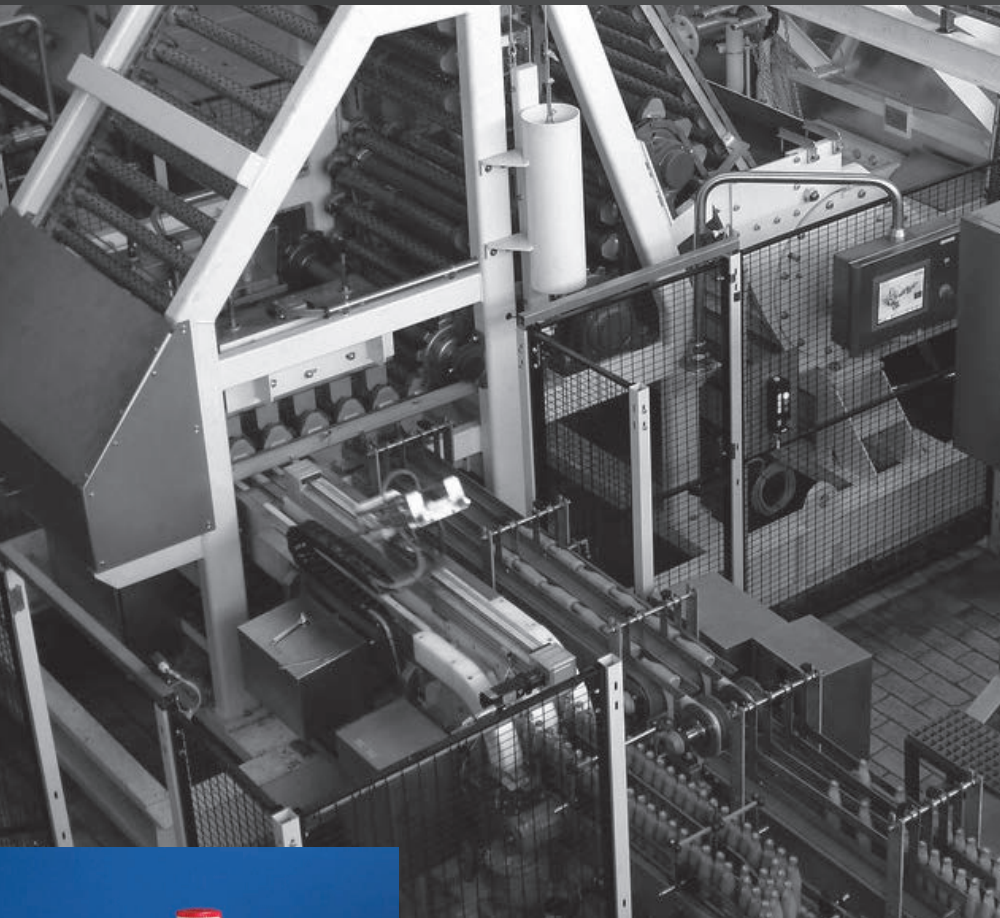

The rotary continuous retort ACB is specially designed for sterilization of liquids packed in PP, HDPE and glass bottles.

The continuous agitation of the product during the heating and cooling process prevents from any burnt product. The continuous and agitated process allows HTST processes (High Temperature Short Time) which are recognized to improve organoleptic qualities and colours.

This continuous sterilizer is specially designed for medium to large productions and can run different sizes and different materials within the same machine.

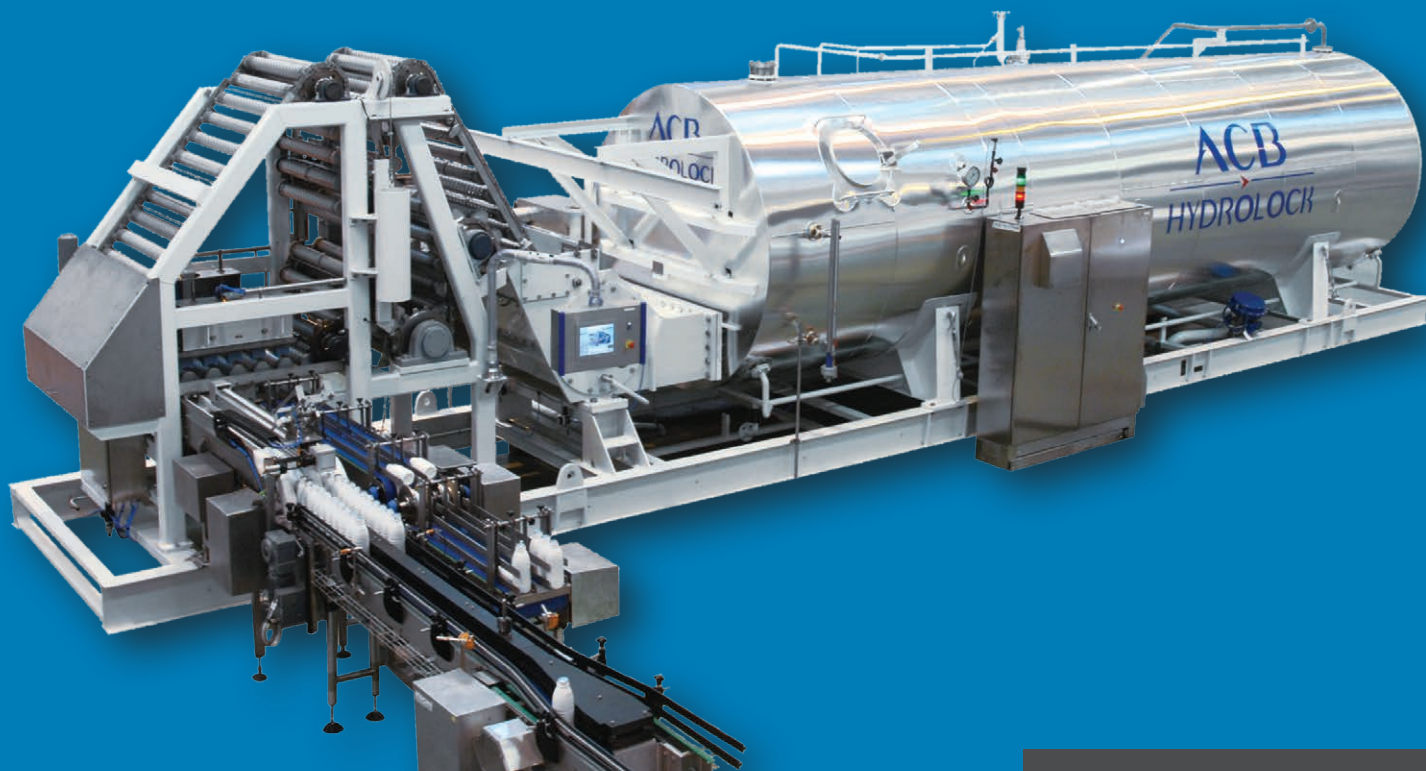

- > Automated loading and unloading
- > No lag time (or waiting time)
- > User friendly HMI with maintenance trackers
- > Continuous control and record of critical parameters
- > Multi recipe system
- > Remote access for maintenance
- > Certifications CE, TUV, ASME
- > Multi PLC brands available (Rockwell, Schneider, Siemens ...)
- > Special design on request



Tubular carriers for bottles

REF	PRODUCTION SPEED (BPH)	LENGTH (M)	WIDTH (M)	HEIGHT (M)
ACB 170	4 000 / 8 000	13.3	2.00	3.10
ACB 200	6 000 / 12 000	18.7	2.70	3.80
ACB 268	8 000 / 16 000	22.10	2.70	3.80
ACB 335	10 000 / 20 000	25.70	2.70	3.80
ACB 350	14 000 / 28 000	26.70	3.2	3.95

Speed given for 10 min holding time and 1 liter / 200 ml bottles